
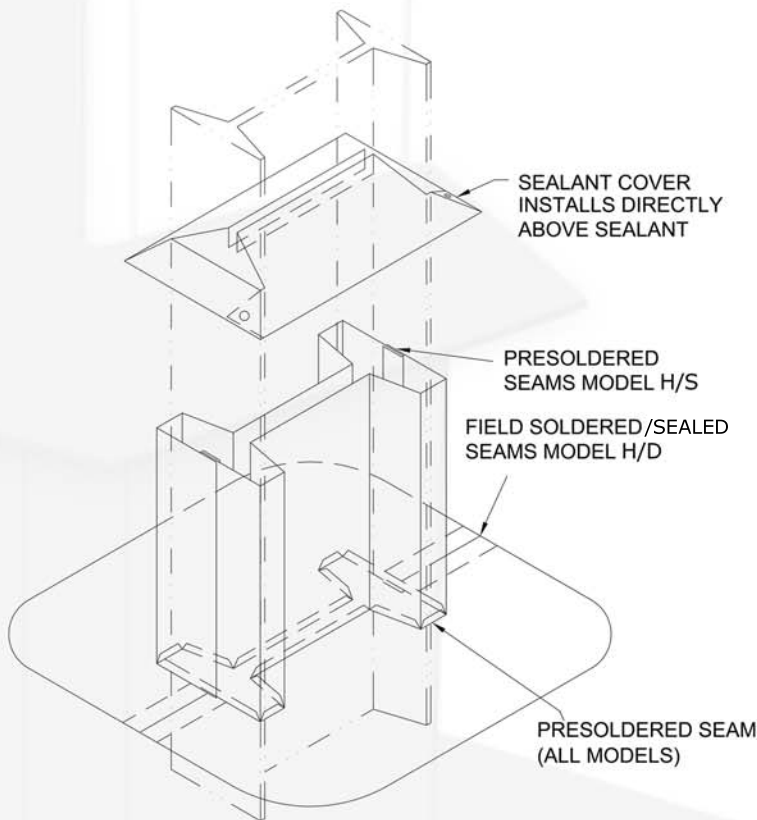


**SPECIFICATION SHEET**

**H BEAM FLASHING**

MODELS H/S, H/D

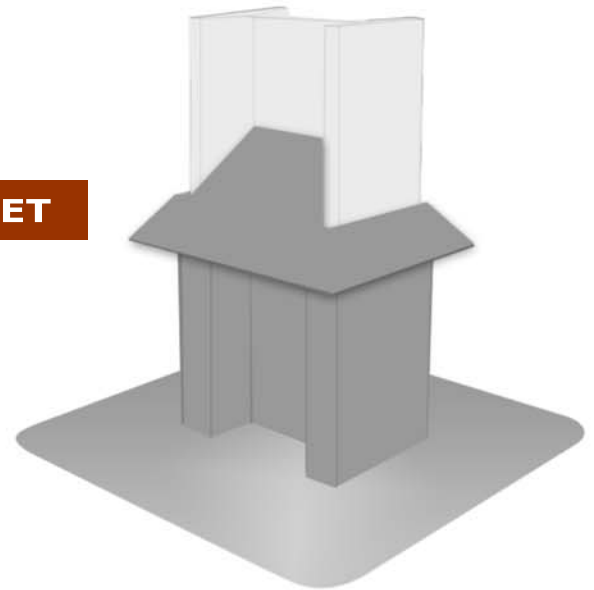

**Model H/D**

Two-piece / Split Flashing

**Intended Use:**

Designed for new or re-roof applications, unit is typically used on W flange columns, horizontal I-Beams, equipment screens, and stair rail channels already in place through roof or wall.

**Model H/S,**

One-piece / Slipover Flashing

**Intended Use:**

Designed in one piece to be either set in place prior to installation or slipped over stubbed columns.

**Advantages and Unique Features:**

1. Requires absolutely no maintenance.
2. No curbs required.
3. Unit is designed for individual pipe size, no field cutting necessary.
4. Sealant cover provides total U.V. shielding.

**Materials:**

1. 26 Ga. stainless steel type 304 2B finish ASTM A240
2. 50% lead / 50% tin ASTM B32 or specify non lead solder ASTM 96.5TS

Available for slopes to 45 degrees.