

SPECIFICATION SHEET

STRUT FLASHING

MODELS U/S, U/D

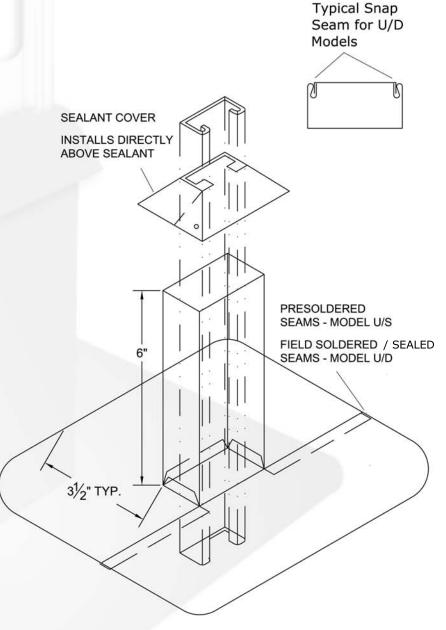

19 SBCFLASHINGS



Model U/D

Two-piece / Split Flashing

Intended Use:

Designed for new or re-roof applications, unit is typically used on strut supports for conduit, pipes, and ducts already in place.

Model U/S

One-piece / Slipover Flashing

Intended Use:

Primarily for new construction using strut supports for conduit, pipes, and ducts.

Advantages and Unique Features:

- 1. Provides a solution in addressing a previous flashing dilemma.
- 2. Requires absolutely no maintenance.
- 3. Impervious to damage by U.V. and most chemicals. Sealant cover provides total U.V.
- 4. Sealant cover provides total U.V. shielding.

Materials:

- 1. 26 Ga. stainless steel type 304 2B finish ASTM A240
- 2. 50% lead / 50% tin ASTM B32 or specify non lead solder ASTM 96.5TS

Available for slopes to 45 degrees.

PROUDLY MADE IN THE USA