
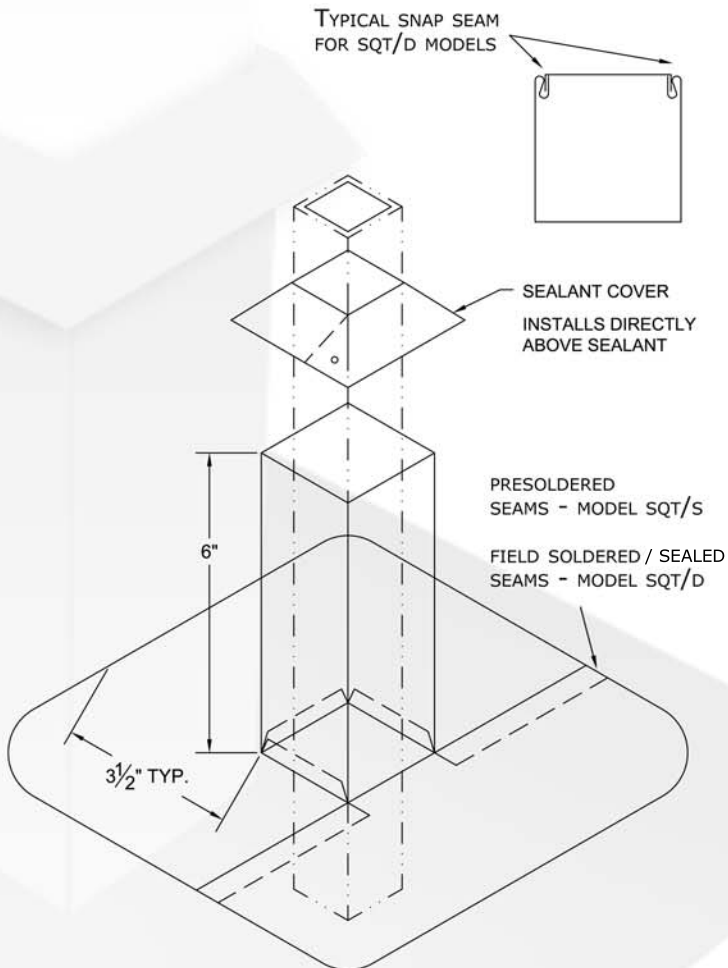


SPECIFICATION SHEET

SQUARE TUBE FLASHING
MODELS SQT/S, SQT/D

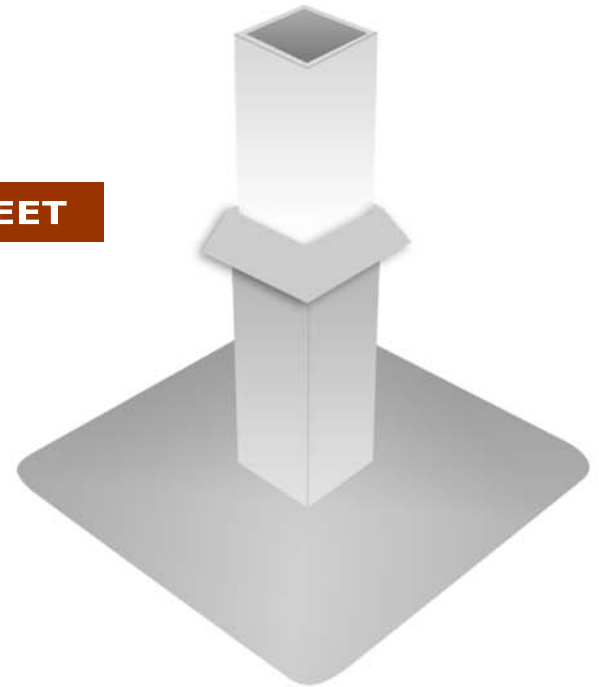

Model SQT/D

Two-piece / Split Flashing

Intended Use:

Designed for new or re-roof applications, unit is typically used on prefabricated square equipment supports or penetrations already in place through roof or wall.

Model SQT/S

One-piece / Slipover Flashing

Intended Use:

Designed in one piece to be either set in place prior to installation or slipped over square penetration.

Advantages and Unique Features:

1. Requires absolutely no maintenance.
2. Prefabricated to proper fit.
3. Impervious to damage by U.V. and most chemicals. Sealant cover provides total U.V. shielding.

Materials:

1. 26 ga. stainless steel type 304 2B finish. ASTM A240
2. 50% lead / 50% tin ASTM B32 or specify non lead solder ASTM 96.5TS

Available for slopes to 45 degrees.